




FENOSOL® AL –ELP

Item No.: 200024 - 200027

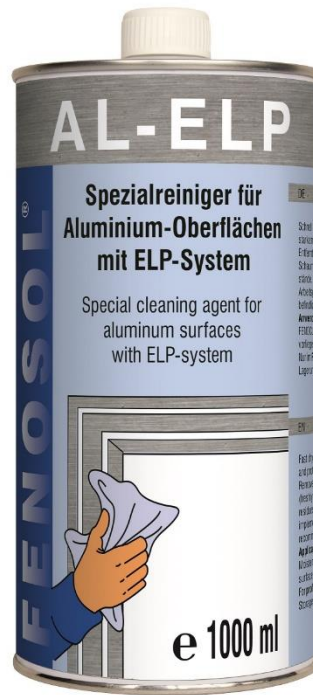

Produktioninformation

1

Description

FENOSOL® AL-ELP - Cleaning agent and mounting aid for aluminum surfaces.

FENOSOL® AL-ELP is an excellent all-rounder when it comes to cleaning of aluminum surfaces. Equipped with a special ELP formula the cleaner cleans anodized, painted and powder coated surfaces quickly and thoroughly. In doing so, it protects the material-specific surfaces and has a strong degreasing effect.

FENOSOL® AL-ELP is specially developed for the removal of non-dried adhesive. It is especially suitable for general cleaning and removal of marking aids, as well as elimination of rubber traces, PUR foam (fresh), bitumen and silicone dyestuff (in freshly applied condition), elimination of lime and mortar residues resulting from construction work.



Application areas

FENOSOL® AL-ELP is used during the production and assembly of aluminum windows, doors, roller shutters and balustrades. Likewise, the cleaning agent is used in many metal-processing industrial areas for the general final cleaning of contamination resulting from processing as well as for degreasing.

Application

Prior to using FENOSOL® AL-ELP we recommend testing the compatibility of the cleaner and the surface that is to be cleaned. For cleaning we recommend FENOCLEAN Special Cleaning-Paper.

Moisten the cleaning-paper with FENOSOL® AL-ELP. Then clean the surface in one direction and one go.

CAUTION: For professional use only. Please ensure that the working area is well ventilated.

2

Technical specifications

Chemical base	Mixture of aliphatic olefins, free from aromatics with ELP-additiv
Colour	Colourless, clear
Density	0,80 g/cm ³
Flashpoint	-1 °C
Ignition temperature	514 °C
Minimum processing temperature	5 °C



FENOPLAST®

Fügetechnik GmbH

Kundennähe und Flexibilität ist unsere Devise

Delivery form

Item-No. 200024: 1000 ml can, 1 PU = 10 cans in a box

Item-No. 200025: 10 l canister, 1 PU = 1 canister

Item-No. 200026: 30 l canister, 1 PU = 1 canister

Barrel on demand

Storage

Keep tightly closed in the original container. Protect from heat. Best used: 24 months from the date of production. We recommend storing the product at temperatures from + 10 °C to + 25 °C.

3

Equipment

Item-No. 200910: FENOCLEAN Special cleaning-paper, 1 PU = 2 roles a 1500 sheet

Item-No. 200941: FENOSOL® Sparanfeuchter

Produktion

Please refer to the safety data sheet for safety-relevant data!

NOTE: The above information can only be used as a general guide. The listed features and performance characteristics are approximate values, which are not part of the product specification. Because of the processing and application conditions outside of our influence and the multitude of different materials, we recommend to carry out sufficient self-tests. A liability for specific application results can therefore not be derived from the information and notes in this leaflet. In the context of our sales conditions, a guarantee is given solely for the consistently high quality of our products. With the publication of this edition, all previous technical information sheets are invalid.



FENOPLAST Fügetechnik GmbH
Zur Dornheck 21-23
35764 Sinn-Fleisbach
Germany
Accessed: 31.01.2018

Tel.: +49(0)2772 57587-0
Fax: +49(0)2772 57587-20
Email: info@fenoplast.de
www.fenoplast.de
Effective 04/2017

