




FENOSOL® S10 UVA

Item no: 200016 - 200019

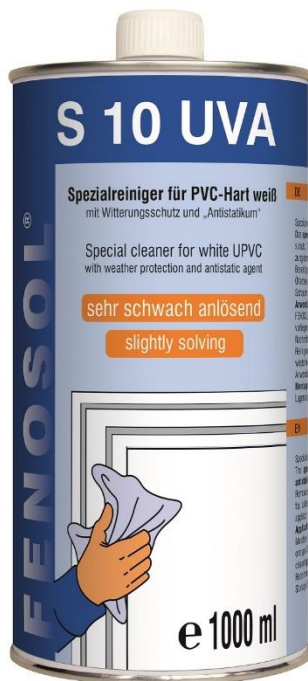

Produktioninformation

1

Description

FENOSOL® S 10 UVA – PVC special cleaner, cleaning agent with a very low-solvent effect for PVC white.

FENOSOL® S 10 UVA quickly and thoroughly removes general surface contamination, marking aids, rubber traces, adhesive residues, PUR foam (fresh), bitumen, as well as silicone dyes (fresh).

The cleaner is equipped with a special UVA system. This provides a special protection, which prevents the re-soiling of the surfaces and ensures weather and UV protection. The antistatic effect is another special feature of the cleaner.



FENOPLAST®

Fügetechnik GmbH

Kundennähe und Flexibilität ist unsere Devise

Application areas

Removes soiling on the glare frames, water bars, cover and flat strips that arise during the construction and installation of PVC windows.

Furthermore, the cleaner is excellently suitable for the preparation of the surfaces before bonding due to its solving effect.

In addition, FENOSOL® S 10 UVA is used in various industries for the cleaning of PVC hard white surfaces.

Application

Prior to use of FENOSOL® S 10 we recommend to test the compatibility of the cleaner and the surface to be cleaned. For cleaning we recommend FENOCLEAN Special Cleaning Paper.

The surfaces to be cleaned must be dry.

Moisten Cleaning Paper with FENOSOL® S 10 UVA. Then clean the surface in one direction, in one go.

FENOSOL® S 10 UVA dissolves PVC. Avoid rubbing and repetitive cleaning.

The cleaning process can be repeated after re-hardening of the PVC hard surface.

For deeper scratches and larger cracks, we recommend FENOSOL® S 5 UVA.

CAUTION: May only be used in production and assembly areas.

Use only on white PVC surfaces.

Technical specifications

Chemical base	Mixed monocarbonate esters, free from aromatics with UVA additive
Colour	Colourless, clear
Density	0,90 g/cm ³
Flashpoint	-4 °C
Ignition temperature	> 200 °C
Minimum processing temperature	5 °C





FENOPLAST®

Fügetechnik GmbH

Kundennähe und Flexibilität ist unsere Devise

Delivery form

Item no. 200016: 1000 ml can, 1 PU = 10 cans in a box

Item no. 200017: 10 l canister, 1 PU = 1 canister

Item no. 200018: 30 l canister, 1 PU = 1 canister

Barrel on demand

Storage

Keep tightly closed in the original container. Protect against heat. Durable: 24 months starting from production date. We recommend to store the product at temperatures from + 10 °C to + 25 °C.

3

Equipment

Item no. 200910: FENOCLEAN Special Cleaning-Paper, 1 PU = 2 roles a 1500 sheet

Item no. 200008: FENOSOL® S 5 UVA 1000 ml can, 1 PU = 10 cans in a box

Item no. 200941: FENOSOL® Plunger Can

Production information

Please refer to the safety data sheet for safety-relevant data!

NOTE: The above information can only be used as a general guide. The listed features and performance characteristics are approximate values, which are not part of the product specification. Because of the processing and application conditions outside of our influence and the multitude of different materials, we recommend to carry out sufficient self-tests. A liability for specific application results can therefore not be derived from the information and notes in this leaflet. In the context of our sales conditions, a guarantee is given solely for the consistently high quality of our products. With the publication of this edition, all previous technical information sheets are invalid.



FENOPLAST Fügetechnik GmbH
Zur Dornheck 21-23
35764 Sinn-Fleisbach
Germany
Accessed: 27.05.2019

Tel.: +49(0)2772 57587-0
Fax: +49(0)2772 57587-20
Email: info@fenoplast.de
www.fenoplast.de
Effective 04/2019

