


760H - drawer/inner drawer - base fixing




- Concealed full extension
- Includes integrated, switchable BLUMOTION S for soft and effortless closing, and can be combined with SERVO-DRIVE* or TIP-ON BLUMOTION
- Synchronised feather-light glide
- BLUMATIC self-closing feature
- Tool-free side, height and tilt adjustment
- Optional tool-free depth adjustment
- Built-in width and depth tolerance compensation
- For assembly of base fixing/cabinet shelf

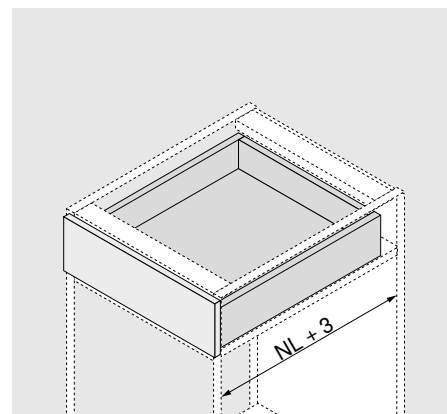

Ordering information

1	Left/right runners for base fixing	
	NL (mm)	BLUMOTION S* 40 kg
	350	760H3500SU
	400	760H4000SU
	450	760H4500SU
	500	760H5000SU
	* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION	

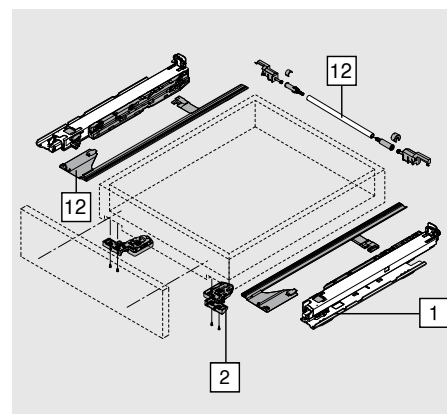

2	Locking device left/right	
	Material	Nylon/steel
	Colour	Orange
	Left/right must be ordered separately	
		T51.7601

Accessories

12	Side stabiliser set	
	For KB 1400 mm for cutting to size	
	For NL up to (mm)	
	400	ZS7M400MU
	600	ZS7M600MU
	750	ZS7M750MU
	Shaft cutting dimensions: Internal cabinet width (LW) – 315 mm	
	Gear rack cutting: NL + 10 mm	

NL Nominal length

*More information about SERVO-DRIVE can be found in TD-116 SERVO-DRIVE for MOVENTO and TANDEM

760H - drawer/inner drawer - base fixing

Planning

Space requirements in the cabinet	Drawer/inner drawer	Drawer	Inner drawer
	$SKW = LW - 42^{+0.0}_{-1.5}$ max 16* 12-15 8.8 min 28.5 ** Limited side adjustment for a drawer side panel thickness of 16 mm, but with full tolerance utilisation of the internal drawer width	$SKL = NL - 10$ 37 10 NL $NL + 3^*$ Additional +12 mm with side stabiliser	$ISKL = SKL + X$ X X + 39 10 NL $NL + X + 3$

Drawer assembly	
Use drilling template T65.1000.02	* TIP-ON BLUMOTION 125 mm

ISKL Inner drawer length
LW Internal cabinet width


NL Nominal length
SKL Drawer depth

SKW Internal drawer width
X Front thickness

760H - pull-out shelf - base fixing




- Concealed full extension
- Includes integrated, switchable BLUMOTION S for soft and effortless closing, and can be combined with SERVO-DRIVE* or TIP-ON BLUMOTION
- Synchronised feather-light glide
- BLUMATIC self-closing feature
- Tool-free side, height and tilt adjustment
- Optional tool-free depth adjustment
- Built-in width and depth tolerance compensation
- For assembly of base fixing/cabinet shelf
- Cannot be combined with pull-out shelf lock

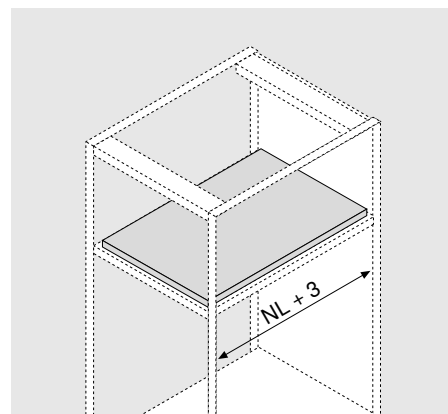

Ordering information

1	Left/right runners for base fixing		BLUMOTION S*
	NL (mm)		40 kg
	350		760H3500SU
	400		760H4000SU
	450		760H4500SU
	500		760H5000SU
	* Suitable for SERVO-DRIVE and TIP-ON BLUMOTION		

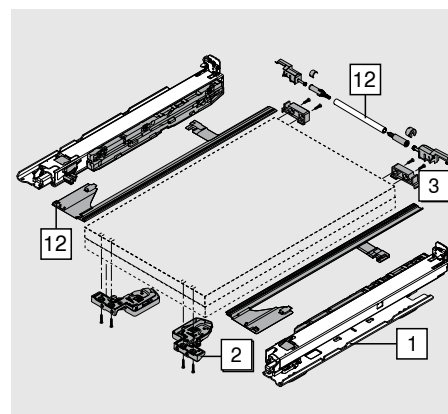

2	Locking device left/right	
	Material	Nylon/steel
	Colour	Orange
	Left/right must be ordered separately	
		T51.7601

3	Back fixing bracket	
	Material	Nylon
	Colour	Natural
		T51.7000.01

Accessories

12	Side stabiliser set	
	For KB 1400 mm for cutting to size	
	For NL up to (mm)	
	400	ZS7M400MU
	600	ZS7M600MU
	750	ZS7M750MU
	Shaft cutting dimensions: Internal cabinet width (LW) – 315 mm	
	Gear rack cutting: NL + 10 mm	


NL Nominal length

*More information about SERVO-DRIVE can be found in TD-116 SERVO-DRIVE for MOVENTO and TANDEM


760H - pull-out shelf - base fixing

Planning

Space requirements in the cabinet

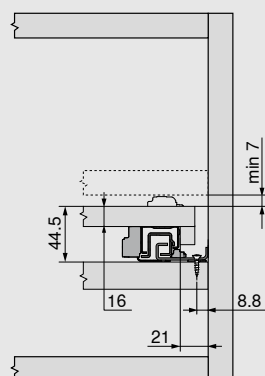


Pull-out shelf

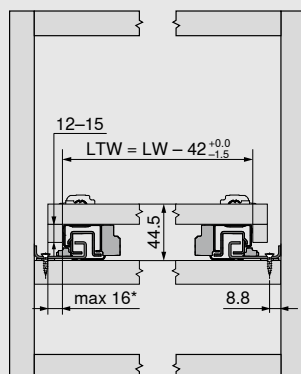


* Limited side adjustment for a side panel thickness of 16 mm on the pull-out shelf, but with full tolerance utilisation of the internal pull-out shelf width

Inset pull-out shelf

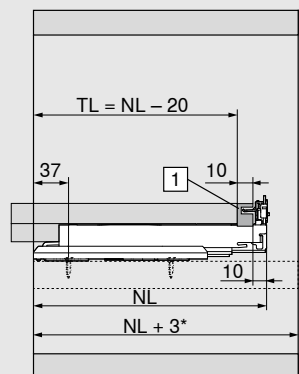


1) Back fixing bracket T51.7000.01

* Additional +12 mm with side stabiliser

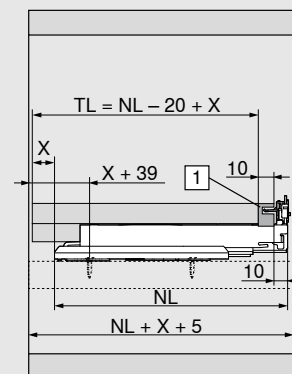

1) Back fixing bracket T51.7000.01

Pull-out shelf assembly

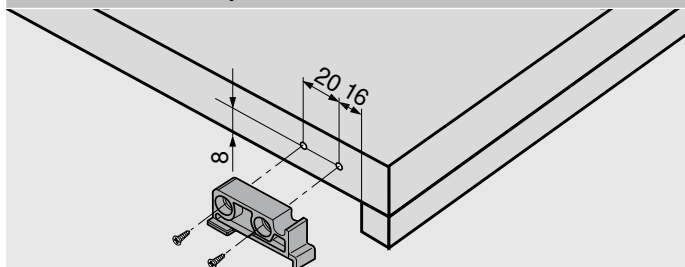


Back fixing bracket assembly

LTW Internal pull-out shelf width
LW Internal cabinet width

NL Nominal length
TL Pull-out shelf length

X Pull-out shelf front piece thickness



* TIP-ON BLUMOTION 125 mm